

Godwin Manufacturing Co., Inc.

600T

Steel Dump Body

NEW

Lighter weight Crossmemberless design for Greater Payloads and Increased Revenue


**POWDER
COATED
PRIMER**



Dump Body



Shown with 9 panel tailgate and barn door options.

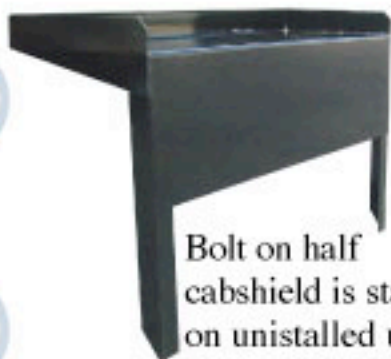

Bolt on half cabshield is standard on uninstalled units

The new Godwin 600T series body features a weight saving smooth crossmemberless understructure, a shock absorbing rubber cushioned mount, a durable **Hardox[®]450** steel floor with cleaner dumping radius corners and enough length, side heights and material options to suit your specific needs. A DuPont[®] powder coat primer and half cabshield are standard features.

600T

Visit Godwin Manufacturing and all affiliated companies on the world wide web. www.godwinmfg.com



Specifications:

Body lengths from 14' to 20' in 6" increments

Side Heights 42", 48", 54" and 60"

FLOOR:

3/16" **Hardox**[®]450 one-piece floor with 12" radius to sides.

SIDES:

One piece 10 gauge 50K minimum yield with fully boxed top rails, material shedding lower rails, full depth rear posts, ladders and grab handles both side and front, continuous weld.

UNDERSTRUCTURE:

Crossmemberless design with 3/16" formed trapezoid longitudinal members with rubber cushion in formed track.

FRONT WALL:

10 gauge 50K minimum yield steel with horizontal formed inverted "V" reinforcements.

TAILGATE:

Three panel 10 gauge 50K minimum yield steel with full perimeter bracing and two intermediate horizontal braces continuous weld.

TAILGATE HARDWARE:

Heavy duty cast steel upward acting top hardware with air operated adjustable cast steel overshot lower hardware and spreader chains. Banjo eyes near bottom of gate control opening you select.

LIGHTING:

FMVSS 108 required lights and reflectors. L.E.D. lights are recessed and rubber grommet mounted.

OPTIONS:


1/4" **Hardox**[®]450 floor in lieu of 3/16"

1/4" **Hardox**[®]450 sides

3/16" 50K minimum yield steel sides, front and gate

3/16" **Hardox**[®]450 sides and gate

Air high lift or two-way barn door tailgate

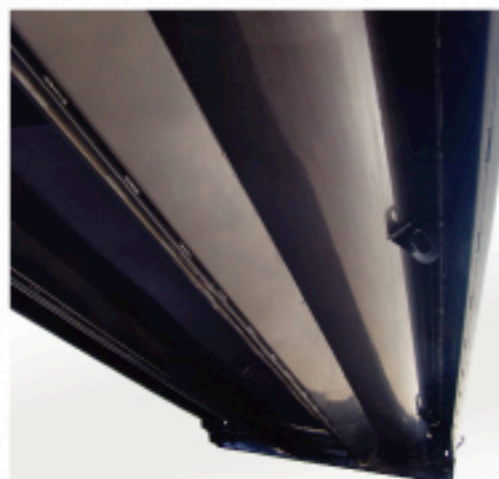

Above is the 600T's crossmemberless understructure and formed long sills with rubber cushion.



Tailgate hardware is offset cast steel with zerck grease fittings.



Shown is the inside of the 600T body and 12" floor to side radius.

Godwin Manufacturing Company, Inc.

Highway 421 South-P.O. Box 1147-Dunn, North Carolina 28335
(910) 892-0141 Fax (910) 892-7402